



3 AA (not included)

XPP-5422GXL

INTRINSICALLY SAFE FLASHLIGHT WITH LASER


NIGHTSTICK[®]
Life Depends on Light[™]

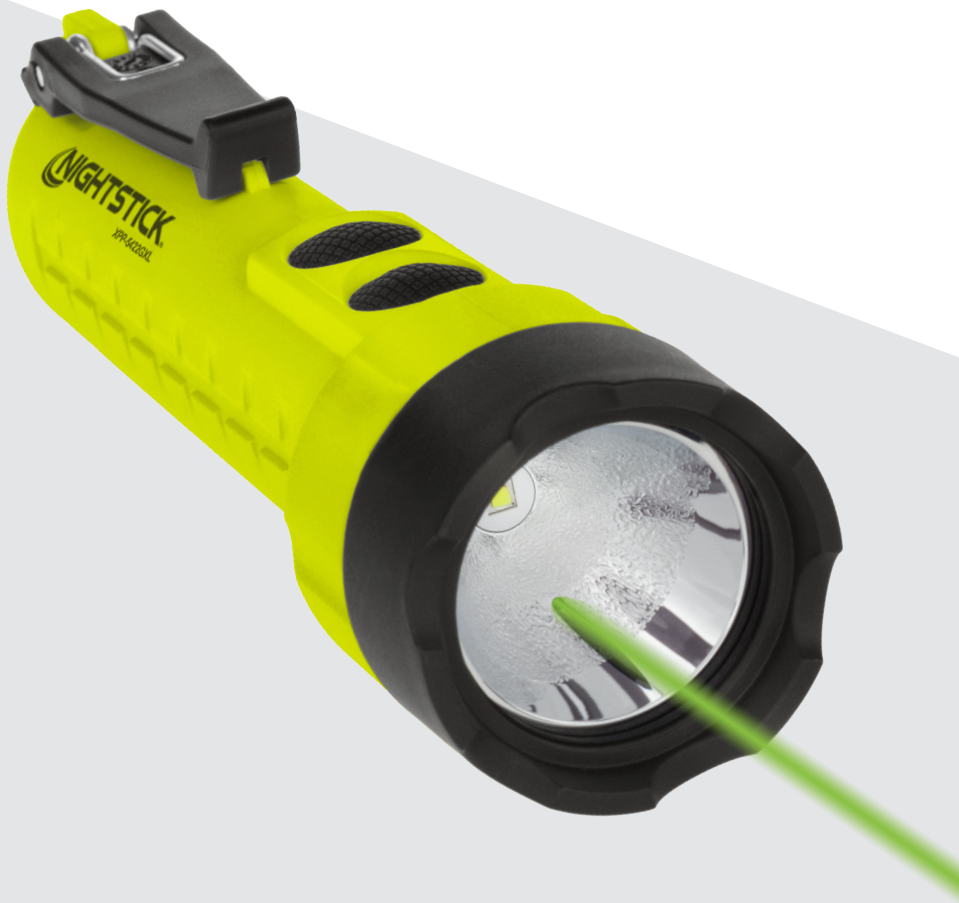

Simultaneous **flashlight**
and **laser** operation



Durable polymer body is
impact & chemical resistant



Sharp focused flashlight beam
for **illumination up to 187 m**



210 LUMENS

1-800-233-2155 • 1-469-326-9400 • nightstick.com

© 2023 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

FLASHLIGHT

- GREEN LASER

3 AA (not included)

ITEM NUMBER/UPC

- XPP-5422GXL, UPC 0 17398 80802 6

MARKET APPLICATIONS

- Hazardous work environments, industrial, automotive

CERTIFICATIONS

- cETLus, CE
- Laser Cert : UL
US: CFR Title21
IEC: IEC60825-1

CASE MATERIAL

- Engineered polymer

LUMENS/RUNTIME FLASHLIGHT

- 210L, 16 hrs. runtime

CANDELA

- 7,970

BEAM DISTANCE

- 187 m

WATER RATING

- ANSI IP-67 dustproof / waterproof

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 7.0 in (178 mm)
- HANDLE DIAMETER: 1.1 in x 1.5 in (28 mm x 38 mm)
- HEAD DIAMETER: 1.8 in (46 mm)
- WEIGHT: 7.6 oz (215 g)

POWER SOURCE


- 3 AA batteries (not included)

WARRANTY

- Limited lifetime

WHAT'S INCLUDED

- Flashlight
- Removable lanyard
- Instruction Manual

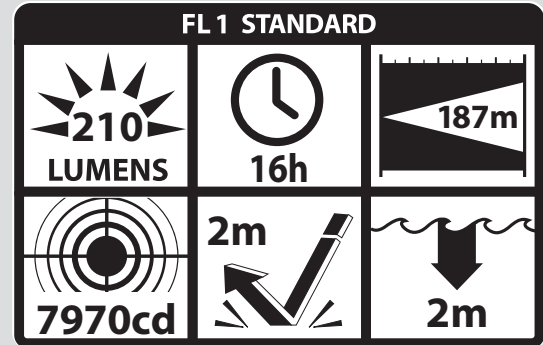

Bayco Products, Inc. XPP-5422GXL
640 S. Sanden Blvd.
Wylie, TX 75098



INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3
CLASS II & III DIV 1 GRPS E-G T135°C
CLASS I ZONE 0 IIC T3
CLASS II ZONE 20 IIIC T135°C
-20°C ≤ Tamb ≤ +40°C
1.5V/Cell AA Alkaline



SEE INSTRUCTION MANUAL
VOIR MANUEL

MFG MM-YY

CERTIFIED

